




1. Locate the rubber gasket on the base. This is covering the mounting bracket



2. Remove the rubber gasket to expose the mounting bracket.

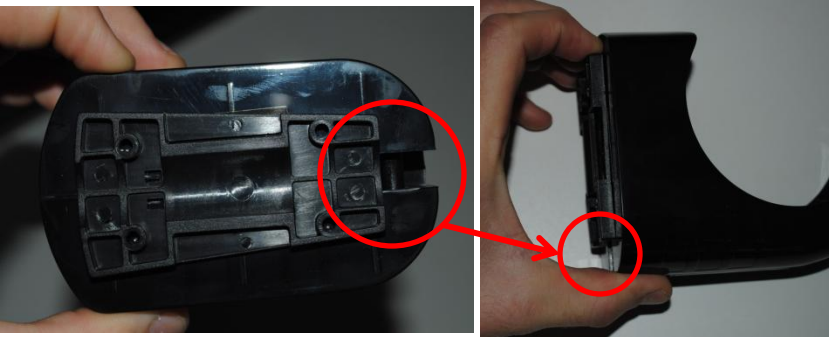

3. Place your hand with your thumb on the side of the base with the opening and the hook (the location that is identified by the red circles) and place your fingers on the top edge of the bracket as shown.



4. Press and pull down and out firmly with your fingers until you hear a pop. Now the bracket should be loose. Pull the bracket back from the base and remove once the hook is clear. You can now mount your bracket.

**\*\*NOTE:** Do not worry about breaking the bracket. You have to press and pull very hard to get it to pop.