



FLASHING LED SAFETY BAND


BATTERY REPLACEMENT INSTRUCTIONS

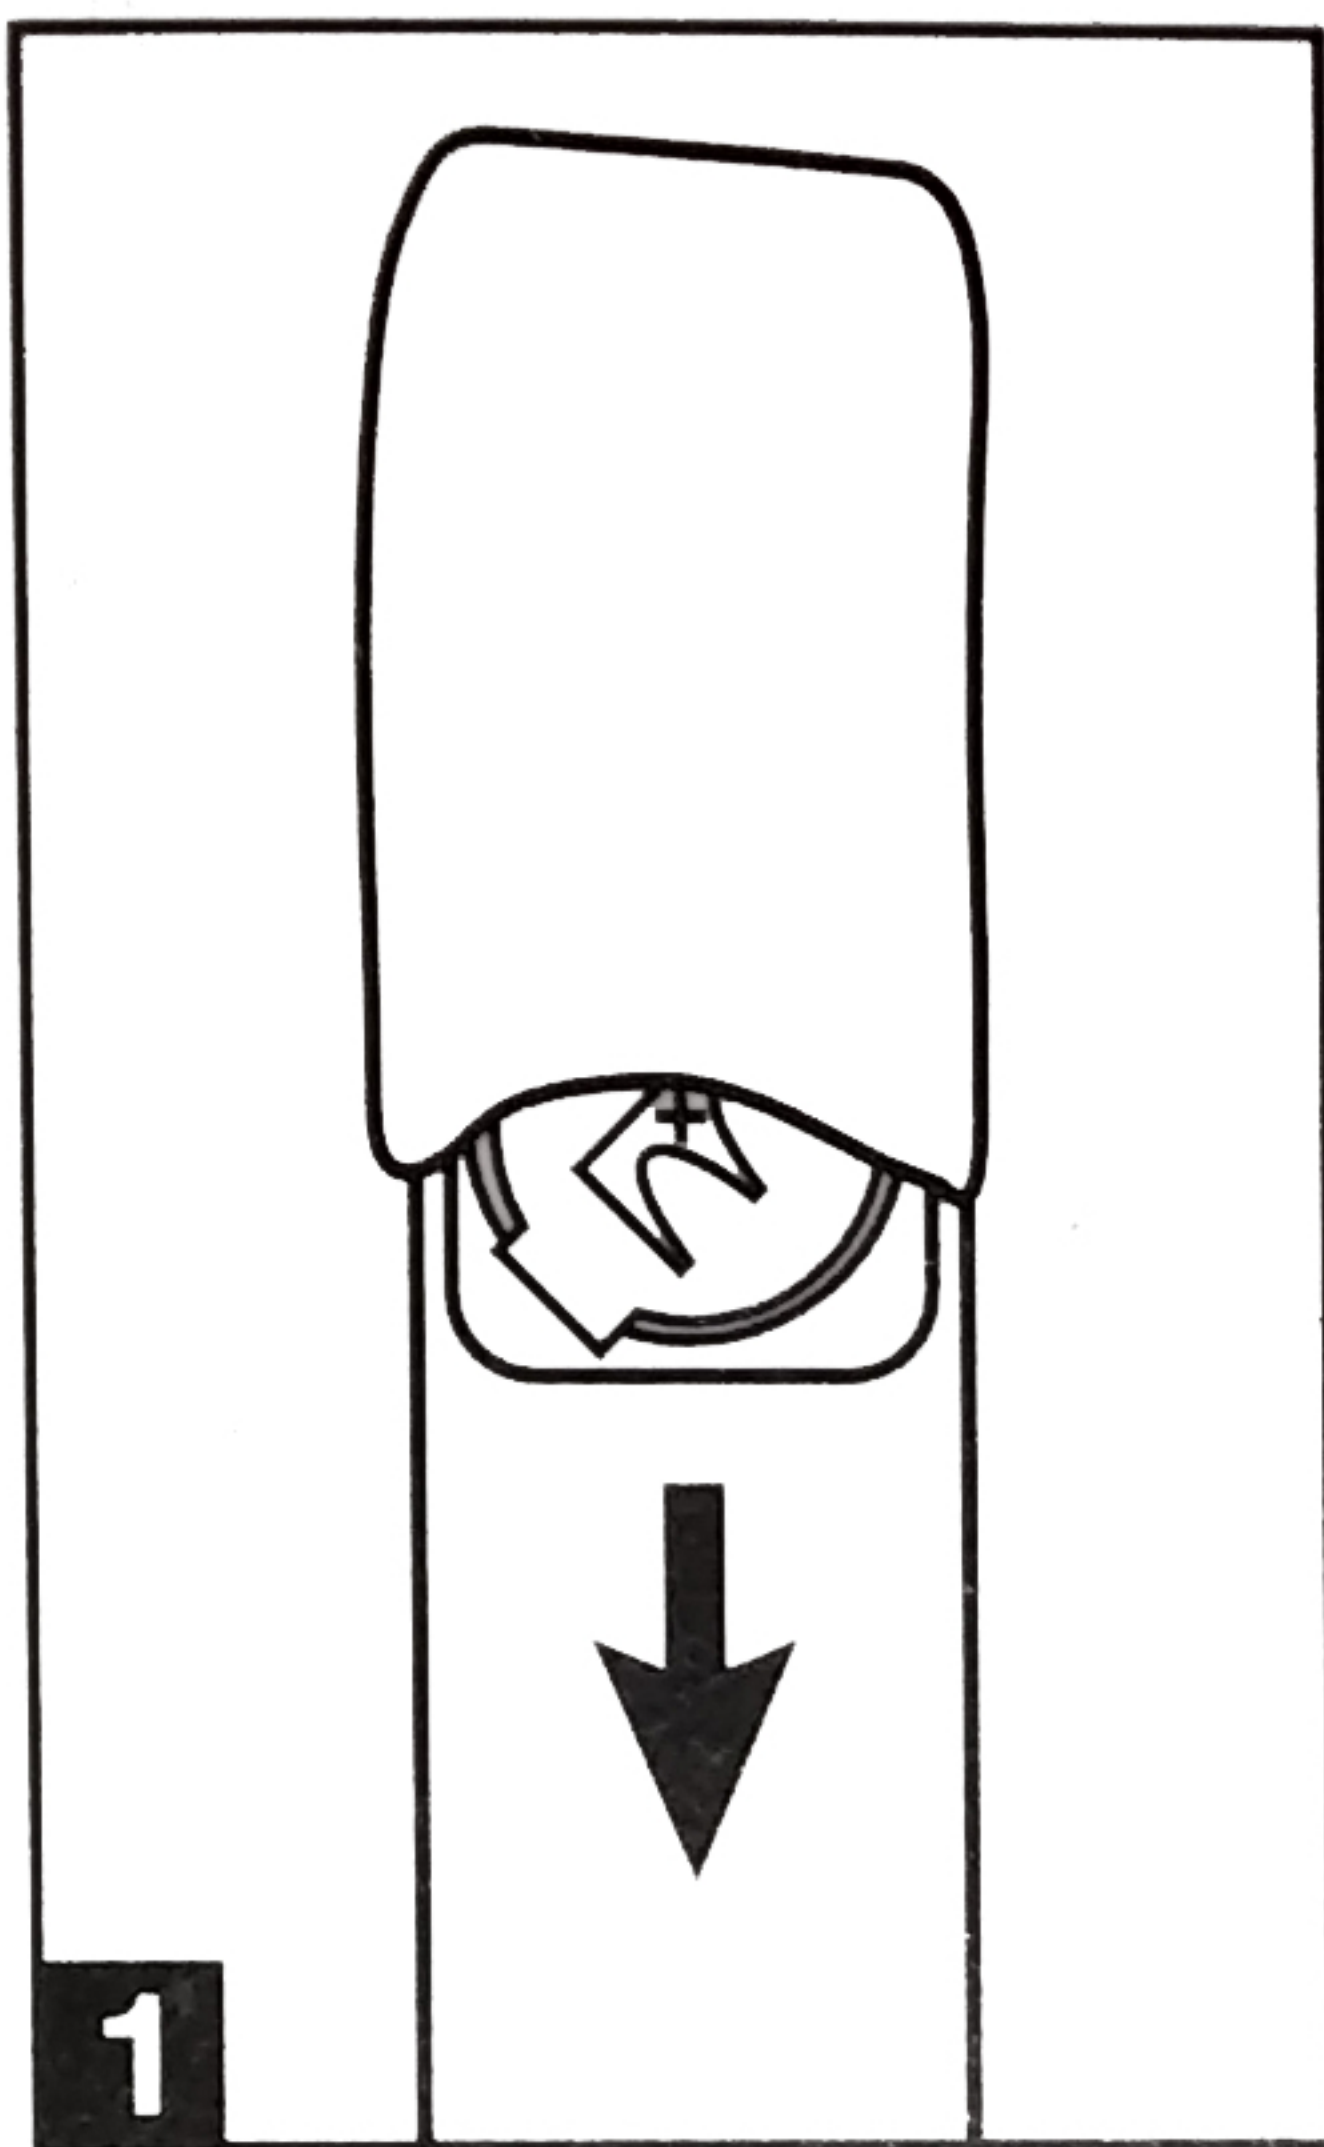


1
Gently pull battery holder out from beneath the elastic pouch on back.

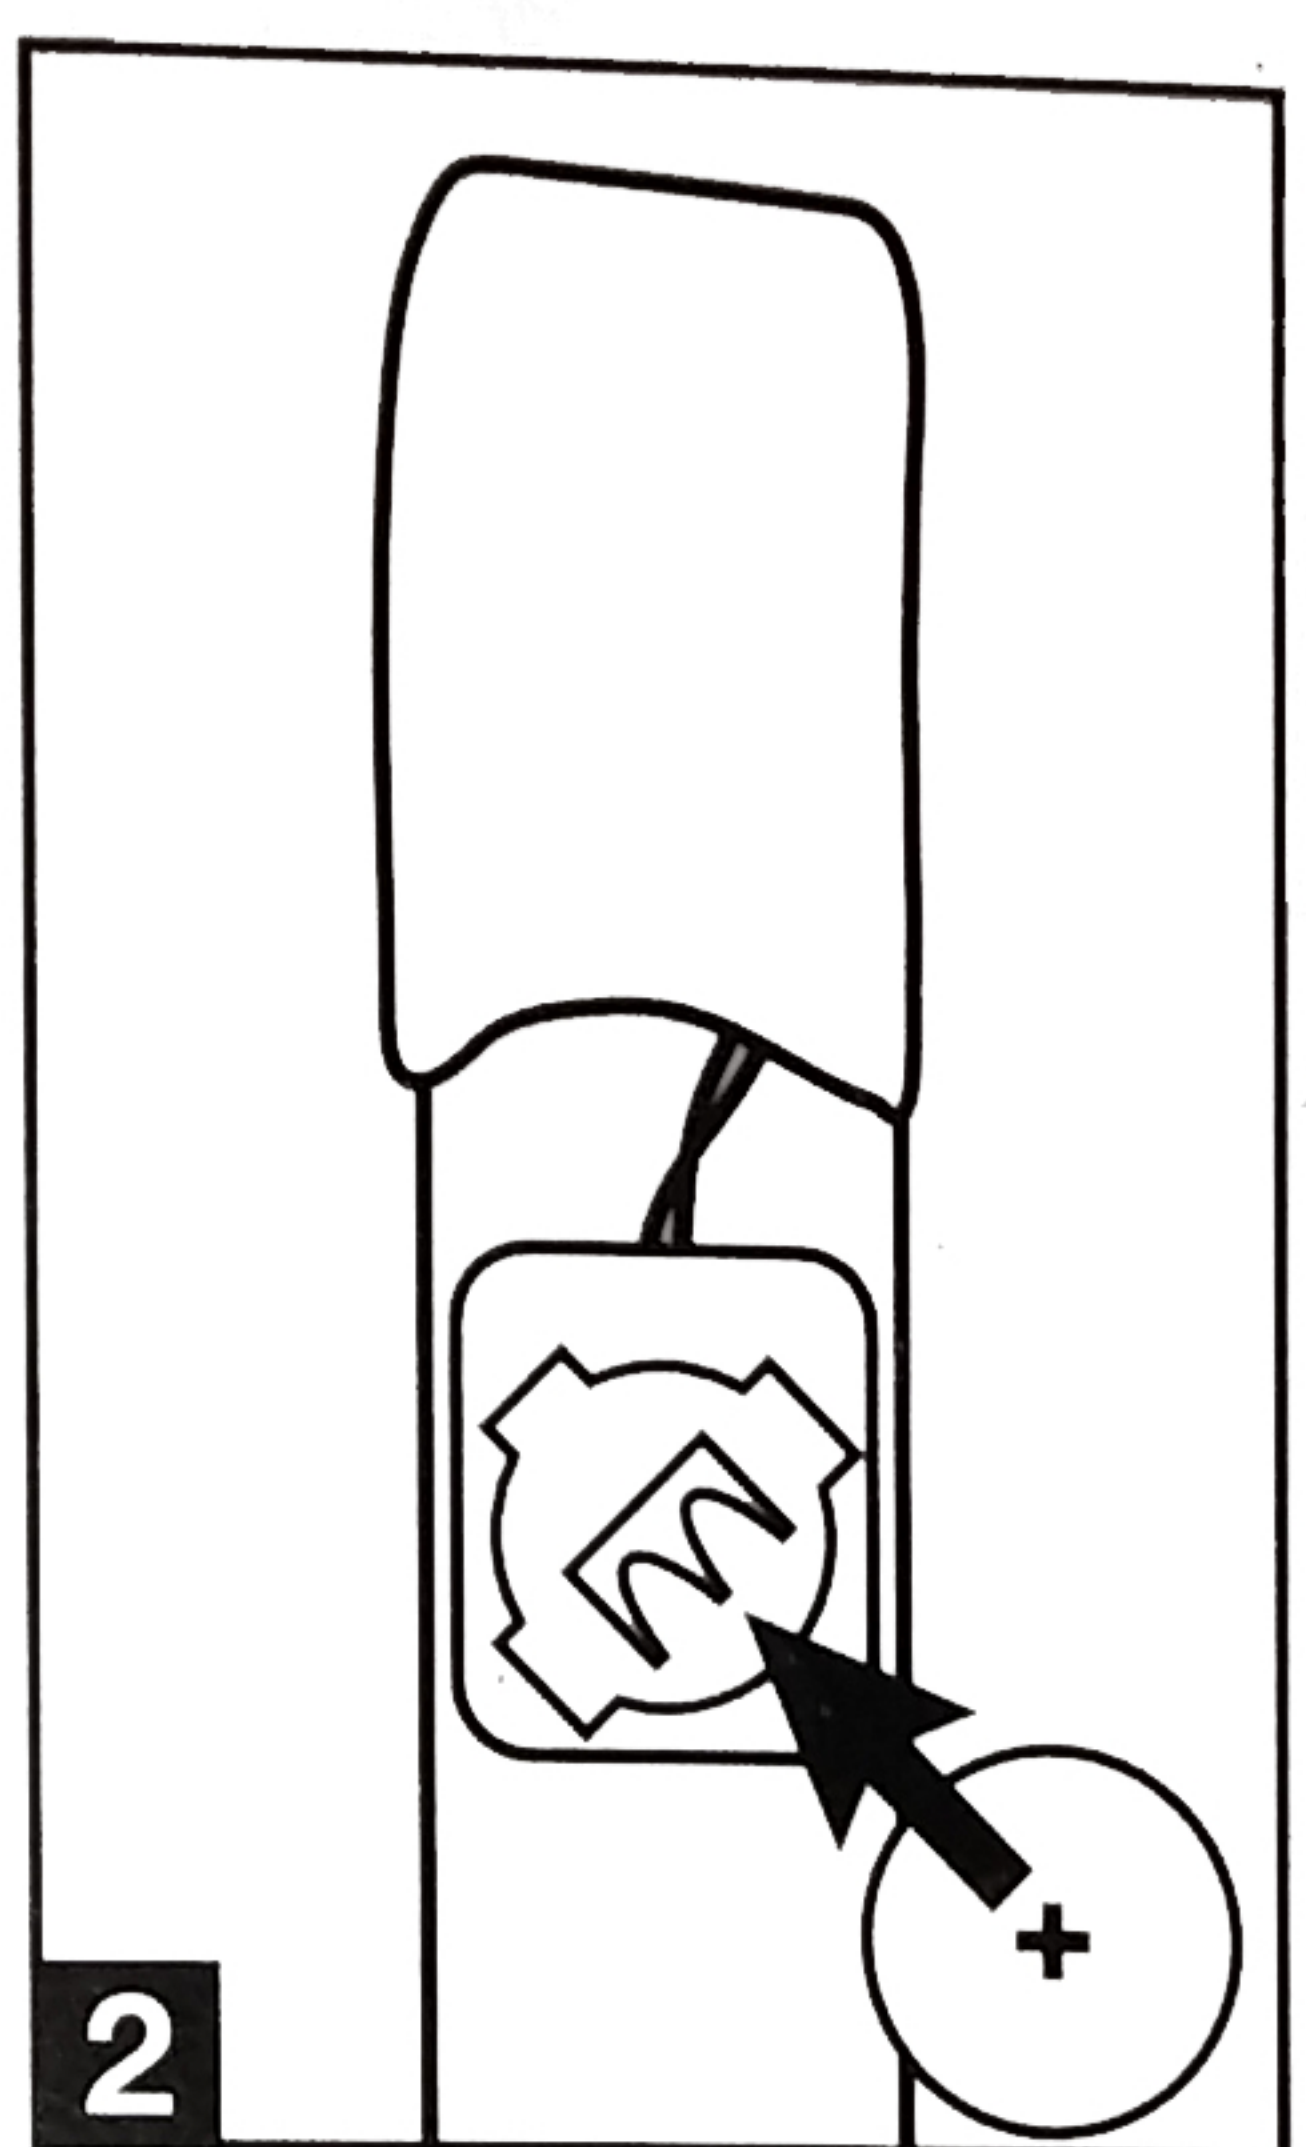

2
Remove old battery.* Insert new CR2032 (3V) battery into holder with positive (+) side facing top of holder.

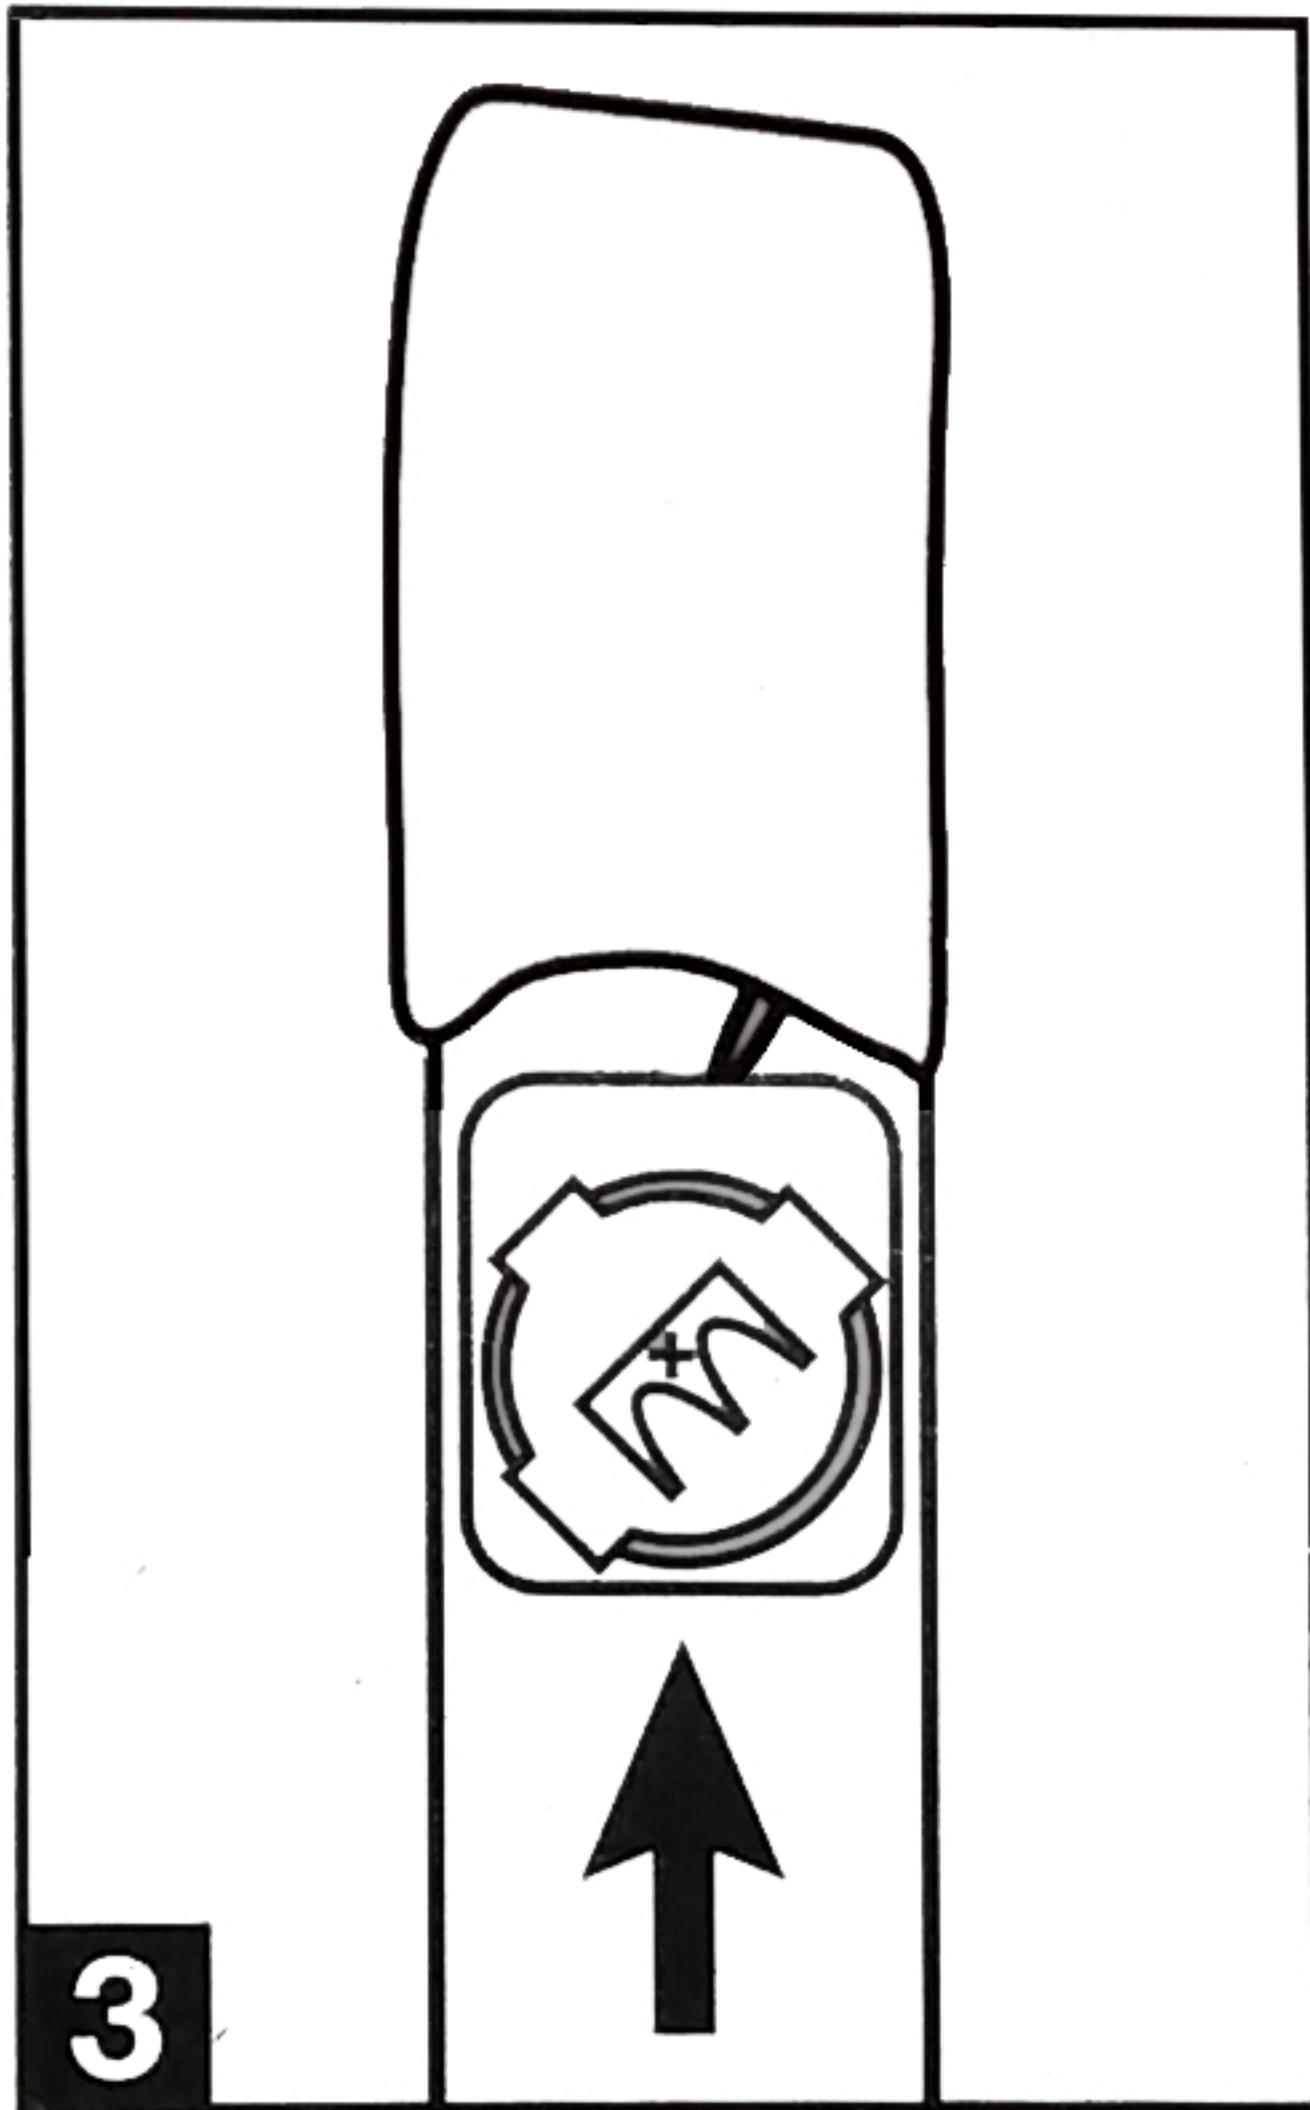

3
Replace battery holder into elastic pouch.

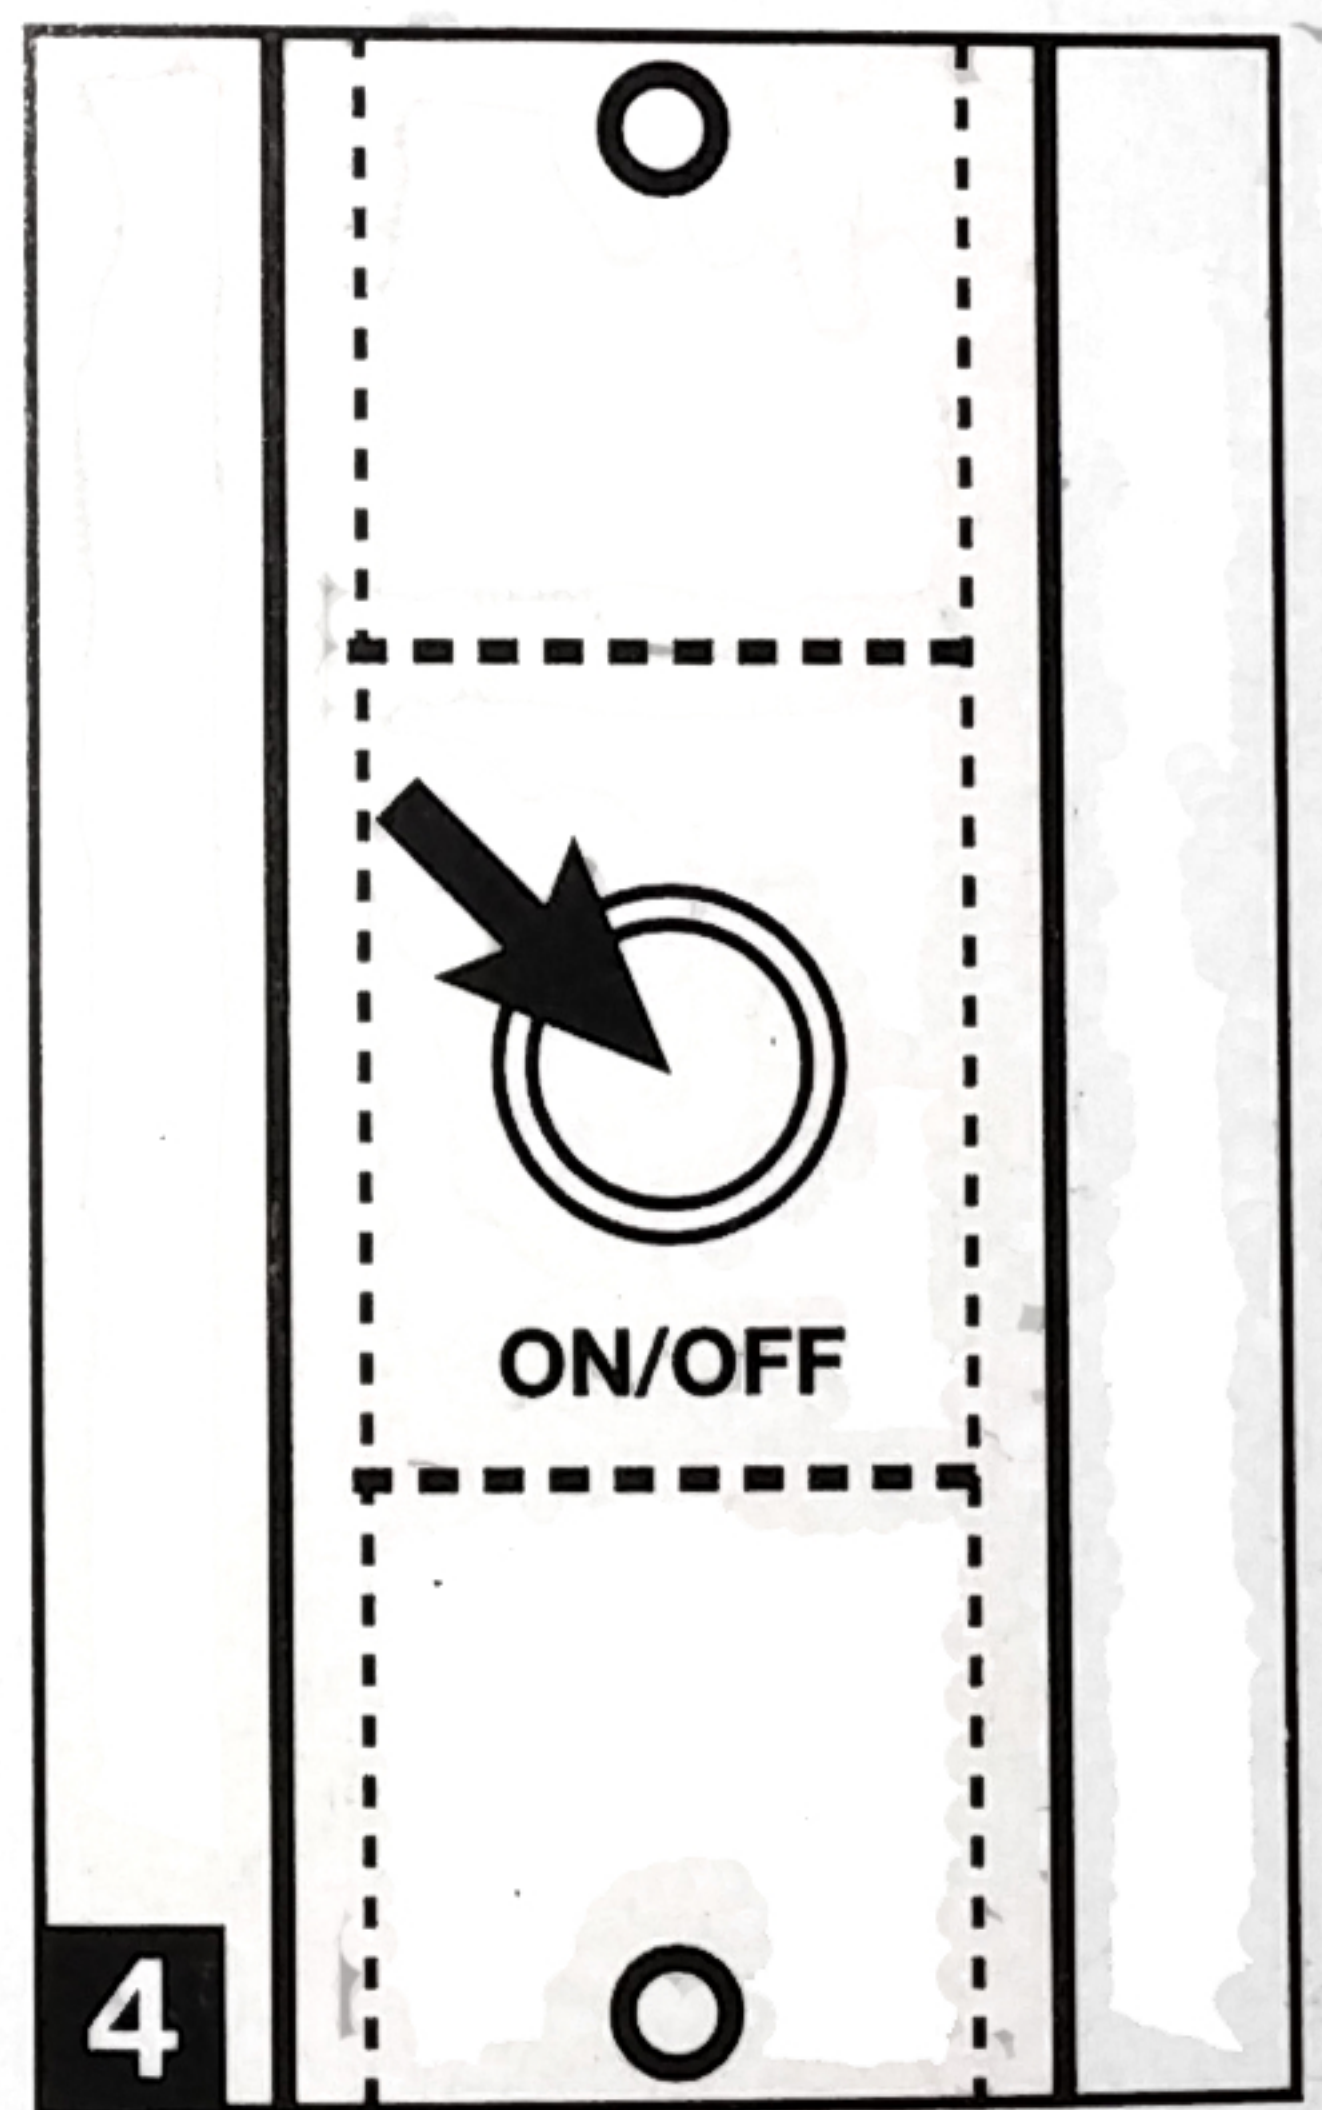

4
Turn safety band over and press ON/OFF button to turn on flashing lights.

* Dispose of old battery according to your local regulations. Battery may also be returned to MAXSA Innovations for proper disposal.

Item #20024



MADE IN CHINA

MAXSA

MAXSA Innovations
8412 Cathedral Forest Drive
Fairfax Station, VA 22039
Tel: 703-495-0661
www.maxsainnovations.com

©2006 MAXSA Innovations, LLC